

**DECLARATION OF PERFORMANCE NO 05CE/BIIa/CSE/04**

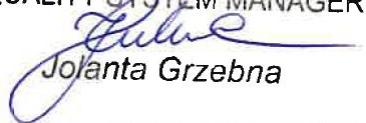
1. The unique identification code of the product type: **05/BIIa/GL/CSE**
2. Intended use or use:  
*Dry-pressed ceramic tiles with water absorption equal to  $3% < E_b \leq 6%$ ; Annex I; BIIa group, glazed (GL); for interior walls and floors of buildings - as described on the packaging.*
3. Manufacturer: **CERSANIT S.A.; AL. Solidarności 36; 25-323 Kielce**
4. System(s) of assessment and verification of constancy of performance: **SYSTEM 4**
5. Harmonised standard: **EN 14411:2012**
6. Declared performance:

<b>Essential characteristics</b>	<b>Performance (level and/or class)</b>	<b>Harmonised technical specification</b>
<b>Reaction-to-fire performance</b>	A1 <sub>FL</sub>	Classified Without Testing (CWT)               EN 14411:2012
<b>Release of dangerous substances:</b>		
- Cadmium	Max 0,07mg/dm <sup>2</sup>	
- Lead	Max 0,8mg/dm <sup>2</sup>	
<b>Breaking strength:</b>		
- thickness $\geq 7,5\text{mm}$	$\geq 1000\text{N}$	
- thickness $< 7,5\text{mm}$	$\geq 600\text{N}$	
<b>Bond strength/adhesion [N/mm<sup>2</sup>]:</b>		
- cementitious adhesives	NPD - No Performance Determined	
- dispersion adhesives		
- reaction resin adhesives		
- mortar		
<b>Slippage according to CEN/TS 16165:2012, Annex B</b>	NPD – R13	
<b>Thermal shock resistance</b>	Meets	
<b>Durability for:</b>		
- internal use:	Meets	
- external use: resistance to freeze-thaw cycles	Does not meet	
<b>Tactility</b>	NPD - No Performance Determined	

A copy of the Declaration of Performance is available on the website: [www.cersanit.com](http://www.cersanit.com)

The performance of the above product is in accordance with the Declaration of Performance. This declaration of performance shall be issued in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer referred to above.

Signed on behalf of the manufacturer:

QUALITY SYSTEM MANAGER  
  
Jolanta Grzebna

Kielce, 01.06.2017  
(place and date of issue)

.....  
(signature)